

UVS-HS HÜCRELİ RADYAL FAN (GERİYE EĞİMLİ SEYREK KANATLI)

UVS-HS VENTILATION UNITS (BACKWARD CURVED)




KULLANIM ALANLARI / ÖZELLİKLERİ AREAS OF USAGE / SPECIFICATIONS

- Hücreli fanlar mahal içindeki kirli havayı dışarı atmada veya kapalı hacime taze hava basımında kullanılır.
- Bu fanlar bütün havalandırma sistemlerinde ve ses seviyesinin önemli olduğu yerlerde kullanılabilir.
- Oteller, restoranlar, hastaneler, sinema salonları, kimya, tekstil endüstrileri, matbaa vb. Kullanım alanlarından birkaçıdır.
- The cabinet fans are used for venting polluted air in the room or for enclosed bulk fresh air.
- These fans can be used in all ventilation systems where sound level is important.
- Hotels, restaurants, hospitals, movie theaters, chemistry, textile industries, printing houses etc. are a few its uses.

MODEL	VOLTAJ (V)	FREKANS (Hz)	POWER (kW)	RPM (d/d)	AIRFLOW (Debi) (m³/h)	PRESSURE (Basınç) (Pa)	KORUMA SINIFI (IP)	AĞIRLIK (kg)
UVS-HS 280 A	230/380	50	1.1	2800	3000	500	55	44
UVS-HS 280 B	230/380	50	2.2	2800	5500	500	55	45
UVS-HS 315 A	230/380	50	2.2	2800	7000	500	55	63
UVS-HS 315 B	230/380	50	3	2800	8000	500	55	64
UVS-HS 355 A	230/380	50	3	2800	9500	600	55	84
UVS-HS 355 B	380	50	4	2800	10000	500	55	87
UVS-HS 400 A	380	50	4	1400	13000	400	55	105
UVS-HS 400 B	380	50	5.5	1400	15000	500	55	109
UVS-HS 450 A	380	50	5.5	1400	16000	500	55	134
UVS-HS 450 B	380	50	7.5	1400	18500	600	55	139
UVS-HS 500 A	380	50	7.5	1400	20000	600	55	168
UVS-HS 500 B	380	50	11	1400	22500	600	55	178
UVS-HS 560 A	380	50	11	1400	25000	600	55	282
UVS-HS 560 B	380	50	15	1400	30000	700	55	290
UVS-HS 630 A	380	50	15	1400	32500	700	55	325
UVS-HS 630 B	380	50	18.5	1400	37000	700	55	345

MODEL	L	W	H	ATIŞ ÖLÇÜLERİ (OUTPUT SIZE)		EMİŞ ÖLÇÜLERİ (INPUT SIZE)	
				A	B	C	D
UVS-HS 280	1050	750	750	361	361	295	670
UVS-HS 315	1100	850	850	405	405	345	770
UVS-HS 355	1200	900	900	455	455	370	820
UVS-HS 400	1300	1100	1100	510	510	470	1020
UVS-HS 450	1400	1200	1200	570	570	520	1120
UVS-HS 500	1500	1250	1250	640	640	595	1170
UVS-HS 560	1500	1350	1350	715	715	670	1270
UVS-HS 630	1700	1500	1500	843	843	745	1420

All dimensions are in mm.

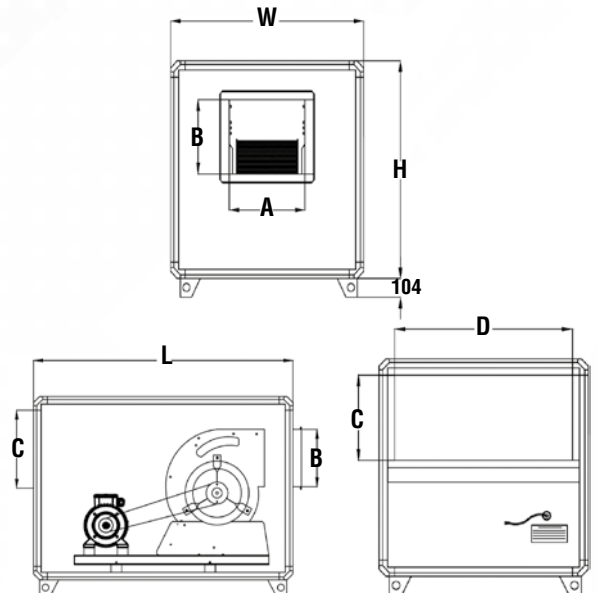

UVS-HS PERFORMANS TABLOSU / UVS-HS PERFORMANCE TABLE

MODEL	Pa	400	500	600	700
UVS-HS 280 A	m ³ /h	3500	3000	-	-
UVS-HS 280 B	m ³ /h	6000	5500	-	-
UVS-HS 315 A	m ³ /h	7500	7000	-	-
UVS-HS 315 B	m ³ /h	8500	8000	-	-
UVS-HS 355 A	m ³ /h	10500	10000	9000	-
UVS-HS 355 B	m ³ /h	10700	10000	9500	-
UVS-HS 400 A	m ³ /h	13000	12000	10000	-
UVS-HS 400 B	m ³ /h	16000	15000	13500	-
UVS-HS 450 A	m ³ /h	17000	16000	14000	-
UVS-HS 450 B	m ³ /h	19500	19000	18500	-
UVS-HS 500 A	m ³ /h	21000	20500	20000	-
UVS-HS 500 B	m ³ /h	23500	23000	22500	-
UVS-HS 560 A	m ³ /h	26000	25500	25000	-
UVS-HS 560 B	m ³ /h	32000	31000	30500	30000
UVS-HS 630 A	m ³ /h	34000	33500	33000	32500
UVS-HS 630 B	m ³ /h	39000	38000	37500	37000

HÜCRELİ ASPİRATÖR YÖN ÇİZELGESİ

CELL ASPIRATOR DIRECTION CHART

