

## UVS-H HÜCRELİ RADYAL FAN (ÖNE EĞİMLİ SIK KANATLI) UVS-H VENTILATION UNITS (FORWARD CURVED)

### KULLANIM ALANLARI / ÖZELLİKLERİ AREAS OF USAGE / SPECIFICATIONS




- Hücreli fanlar mahal içindeki kirli havayı dışarı atmada veya kapalı hacime taze hava basımında kullanılır.
- Bu fanlar bütün havalandırma sistemlerinde ve ses seviyesinin önemli olduğu yerlerde kullanılabilir.
- Oteller, restoranlar, hastaneler, sinema salonları, kimya, tekstil endüstrileri, matbaa vb. Kullanım alanlarından birkaçıdır.
- The cabinet fans are used for venting polluted air in the room or for enclosed bulk fresh air.
- These fans can be used in all ventilation systems where sound level is important.
- Hotels, restaurants, hospitals, movie theaters, chemistry, textile industries, printing houses etc. are a few its uses.

MODEL	VOLTAJ (V)	FREKANS (Hz)	POWER (kW)	RPM (d/d)	AIRFLOW (Debi) (m³/h)	PRESSURE (Basınç) (Pa)	KORUMA SINIFI (IP)	AĞIRLIK (kg)
UVS-H7X7 A	230/380	50	0.75	1400	2250	400	55	69
UVS-H7X7 B	230/380	50	1.1	1400	2800	400	55	72
UVS-H9X9 A	230/380	50	1.1	1400	4200	300	55	80
UVS-H9X9 B	230/380	50	1.5	1400	4850	300	55	82
UVS-H10X10 A	230/380	50	1.5	1400	5550	300	55	89
UVS-H10X10 B	230/380	50	2.2	1400	6300	400	55	94
UVS-H12X12 A	230/380	50	2.2	1400	8200	400	55	120
UVS-H12X12 B	230/380	50	3	1400	8750	400	55	123
UVS-H15X15 A	230/380	50	3	1400	11250	300	55	138
UVS-H15X15 B	380	50	4	1400	12500	400	55	144
UVS-H18X18A	380	50	5.5	1400	16050	500	55	186
UVS-H18X18 B	380	50	7.5	1400	18800	500	55	193

MODEL	L	W	H	ATIŞ ÖLÇÜLERİ (OUTPUT SIZE)		EMİŞ ÖLÇÜLERİ (INPUT SIZE)	
				A	B	C	D
UVS-H7X7 A	850	600	600	235	205	220	520
UVS-H7X7 B	850	600	600	235	205	220	520
UVS-H9X9 A	950	650	650	295	260	245	570
UVS-H9X9 B	950	650	650	295	260	245	570
UVS-H10X10 A	1050	750	750	335	290	295	670
UVS-H10X10 B	1050	750	750	335	290	295	670
UVS-H12X12 A	1100	850	850	400	335	345	770
UVS-H12X12 B	1100	850	850	400	335	345	770
UVS-H15X15 A	1200	900	900	485	408	370	820
UVS-H15X15 B	1200	900	900	485	408	370	820
UVS-H18X18A	1260	1000	1000	560	480	420	920
UVS-H18X18 B	1260	1000	1000	560	480	420	920

All dimensions are in mm.

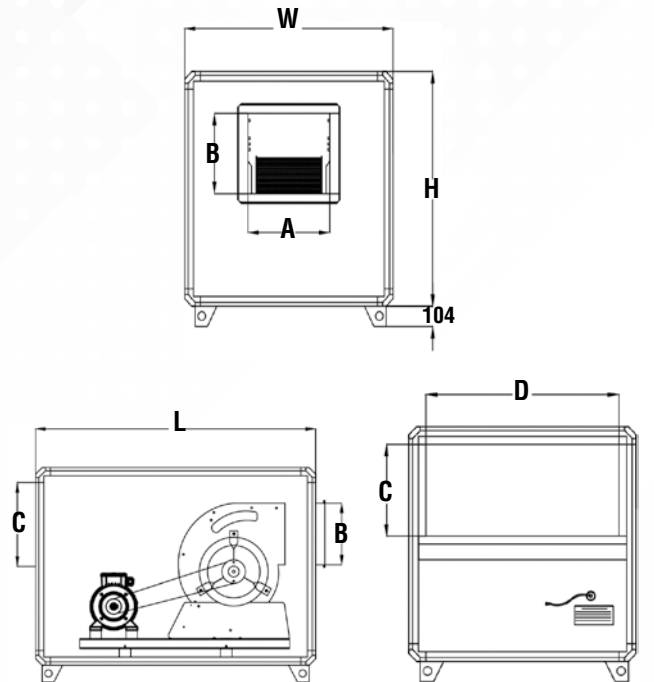

**UVS-H PERFORMANS TABLOSU**

MODEL	Pa	200	250	300	350	400	450	500	600	700	800
UVS-H7X7 A	m <sup>3</sup> /h	2600	2500	2450	2350	2250	2150	2050	1850	1600	1350
UVS-H7X7 B	m <sup>3</sup> /h	3150	3050	3000	2900	2800	2750	2650	2500	2300	2150
UVS-H9X9 A	m <sup>3</sup> /h	4500	4350	4200	4050	3900	3750	3550	3200	2750	2300
UVS-H9X9 B	m <sup>3</sup> /h	5100	4950	4850	4700	4550	4450	4300	4000	3650	3300
UVS-H10X10 A	m <sup>3</sup> /h	6000	5650	5550	5400	5200	5000	4800	4350	3850	-
UVS-H10X10 B	m <sup>3</sup> /h	7200	7000	6900	6800	6300	6150	5950	5650	5250	4850
UVS-H12X12 A	m <sup>3</sup> /h	8550	8500	8450	8300	8200	7250	6950	6250	5500	-
UVS-H12X12 B	m <sup>3</sup> /h	9600	9500	9200	9000	8750	8500	8250	7750	7200	6500
UVS-H15X15 A	m <sup>3</sup> /h	11750	11500	11250	10900	10550	10200	9800	8900	7800	-
UVS-H15X15 B	m <sup>3</sup> /h	13300	13000	12700	12400	12500	11850	11550	10850	10050	-
UVS-H18X18A	m <sup>3</sup> /h	19000	18500	18000	17550	17050	16550	16050	15000	13800	12600
UVS-H18X18 B	m <sup>3</sup> /h	-	21000	20500	20150	19750	19300	18800	17950	17000	-

**HÜCRELİ ASPİRATÖR YÖN ÇİZELGESİ**  
**CELL ASPIRATOR DIRECTION CHART**
